

EKA OPEN

ANTISTATEX® RANGE



EKA OPEN is a new excellent product from Ekamant. The product has extra-extra open grit distribution, which reduces the clogging of the belt.

When sanding soft and resinous wood, the lifetime of the belt increase due to less clogging compared with regular belts.

The excellent cutting action of the aluminium oxide grit enables minimal fibre rising and more even surface.

The Antistatex® treatment provides a fully antistatic effect which further improves the lifetime of the product.

TECHNICAL SPECIFICATION

- Backing:** F-weight paper
- Bonding:** Resin over resin
- Treatment:** Fully Antistatic
- Grit:** Aluminium Oxide
- Coating:** Superior Extra Open
- Grit range:** P 60—P 120 (A-Range*)
- Width:** 1370 mm standard

APPLICATIONS

Calibrating and intermediate sanding of solid wood and veneer.


Wood: Soft and resinous wood and some of application on board on frame.

Board:

Lacquer:

Specials:

RECOMMENDED FORMS

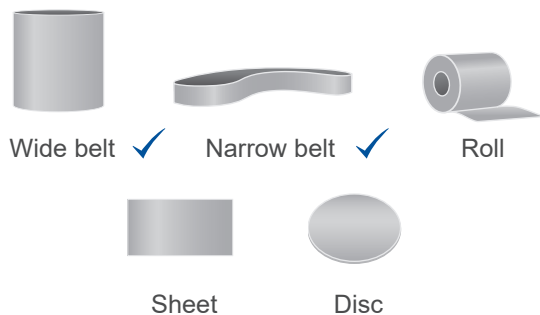

EKAMANT

SWEDISH QUALITY COATED ABRASIVES

Ekamant AB, Järnvägsgatan 44, SE-285 23 Markaryd, Sweden / www.ekamant.com