

EKA 3001 N

ANTISTATEX® RANGE



EKA 3001 N is designed for those applications where surface quality is crucial and more important than high stock removal rates. The silicon carbide grit in combination with a pliable E-weight paper contributes to an efficient lacquer sanding operation with fine scratch pattern. EKA 3001 N is further treated with a new improved stearate coating which effectively reduces clogging problems and contributes to an improved surface finish.

The Antistatex® bonding system provides a fully antistatic effect which reduces clogging of the product and minimizes dust load on the sanding surface.

TECHNICAL SPECIFICATION

- Backing:** E-weight paper
- Bonding:** Resin over resin
- Treatment:** Fully Antistatic with Stearate layer
- Grit:** Silicon Carbide
- Coating:** Semi-Open
- Grit range:** P 240—P 1000 (A-Range*)
P 180—P 220 (B-Range*)
- Width:** 1370 mm standard, 1420 mm per request

APPLICATIONS

Excellent product for lacquer sanding when high finish is requested.


Wood:

Board:

Lacquer: NC, PU, PE and UV-lacquer

Specials:

RECOMMENDED FORMS

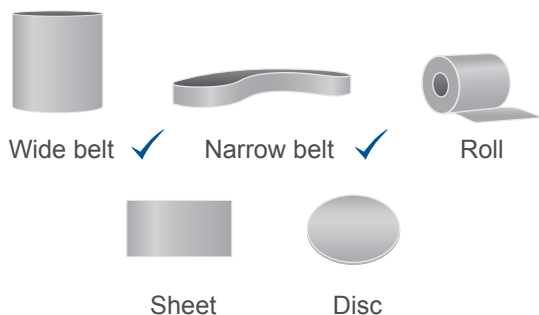

EKAMANT
SWEDISH QUALITY COATED ABRASIVES